

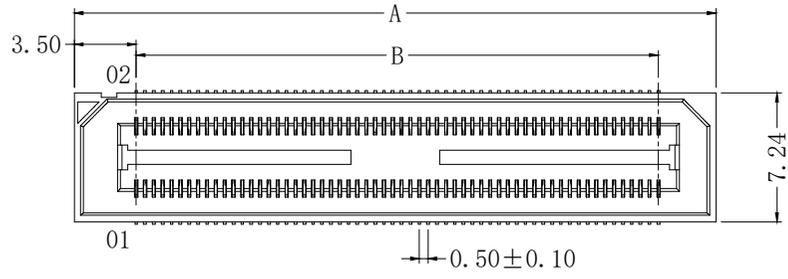
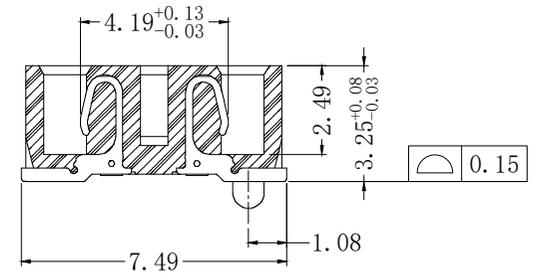


版次	变更内容	审核	日期

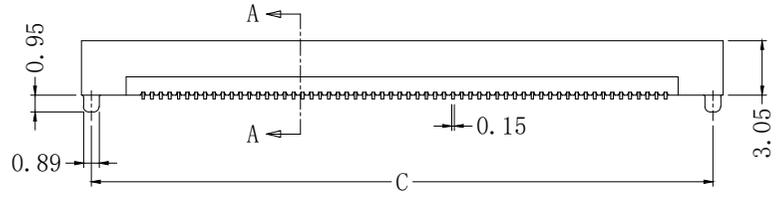



BSH05-SM-2\*xxP X

单排芯数: \_\_\_\_\_  
 接触电镀: \_\_\_\_\_  
 10G: GOLD 10u"  
 30G: GOLD 30u"

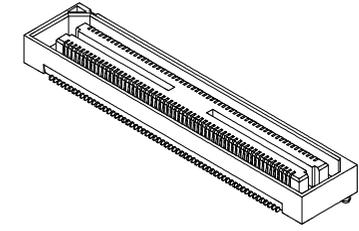

SECTION A-A  
SCALE 4:1

POS	A	B	C
2*30	21.30	14.50	20.13
2*50	31.30	24.50	30.13
2*60	36.30	29.50	35.13
2*90	51.30	44.50	50.13
2*120	66.30	59.50	65.13
2*150	81.30	74.50	80.13

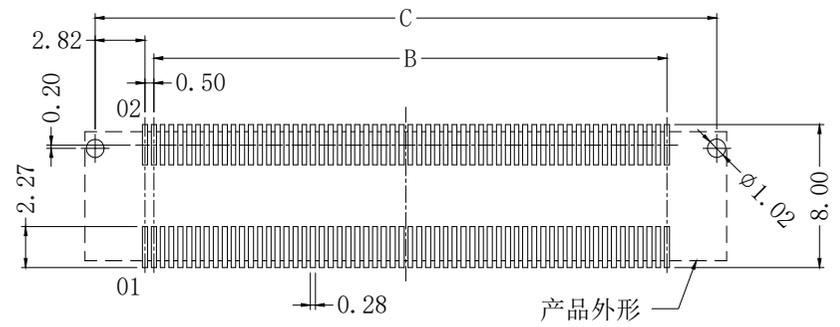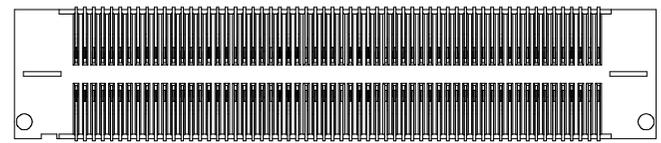

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05

产品特性:

- 绝缘体: LCP, UL 94V-0, 颜色: 黑色
- 端子: 磷青铜
- 电镀: 接触区镀金
- 额定电流: 2 A (2个引脚供电)
- 工作温度: -55° C TO +125° C
- 额定电压: 175V AC

合 高		
BSH05	BTH05	
	4.27	7.27
3.25	5.00	8.00

公差: · X ±0.35 · XX ±0.25 · XXX LNLB ±2°	版次:	A	上海宗进电子科技有限公司			
	比例:		Shanghai Zong Jin Electron Technology Co.LTD			
	单位:	mm	型号:	BSH05-SM-2*xxPX	签名	日期
	页码:	1/1	描述:	0.5mm BTB 插座	绘图:	
	图号:			确认:		
				审核:		